

Simplicity ® PhotoSlide™ Override Lighting Control for Daylighting Systems

60000000000000

- ALE DE COMPANY

SS1222



Override Lighting Control for Daylighting Systems Exclusive Momentary ON feature of our newest **PhotoSlide**TM dimmer provides manual override control of 24VDC low-voltage power packs, sensors and lighting panels with a simple push of the rocker switch. When the lights are active, the separate 0-10VDC slide control provides the occupant with variable light control and the ability to additionally set a maximum light level override.












ATTALANTS:

TECHNICAL DATA: *Simplicity*[®] PhotoSlide[™] Override Lighting Control for Daylighting Systems

Simplicity® Slide Dimmer with *Momentary ON*

Model	PS-LED-010-Momentary ON-xx-24VDC (where "xx" denotes WH or IV)
Switch Rating	24VAC, 20mA
Dimming Input	0-10VDC (from LED control device, driver, or fixture)
Low Output	OVDC
High Output	10VDC
Wiring	
Switch Dimmer	Blue and Blue: 24VDC low-voltage, momentary ON
Dimmer	Violet and Gray: 0-10VDC sinking voltage
Compliance	NEC Class 2; IECC; ASHRAE 90.1; California Title 24 (2016)

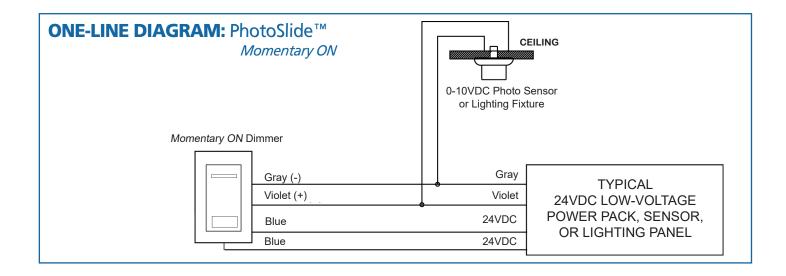



Ph: (970) 484-9048 • 200 Rome Court • Fort Collins, CO 80524 www.huntdimming.com